

## MSite Full Height Turnstile



### Take a turn for the better

Featuring a Rotalock rotation locking system which is CE compliant, and turns in both directions.



### Be on the safe side

In the event of a power failure our turnstiles can be factory-set for either fall-secure or fall-safe operations.



### Customise it your way

Reader mounting brackets are available providing the perfect space for mounting our biometric readers.



[Learn More >](#)

Our turnstiles offer security for the perimeter of your site and keep your team moving – whether large or small. Withstanding tough weather and operation conditions with 3 and 4 arm design they can be assembled in either a single or double size.



### Robust exterior

Corrosion resistant, unaffected by dust, dirt or moisture.



### Programmable

Programmable logic with user diagnostic features.



### Fire alarm options

Set turnstiles to free rotation when triggered indefinitely.



### Suspended rotor technology

Eliminating stress on the base bearing with shock absorbing rubber coupling system.




+44 (0) 333 456 2001



MSite.com


# MSite Full Height Turnstile

## Technical Specification

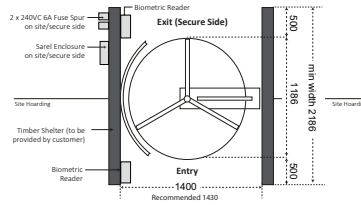


### Plan view - Design 1

Single Turnstile Suggested Shelter  
Plinth width: 500mm required either side of Turnstile for Biometric Readers. Do not scale.

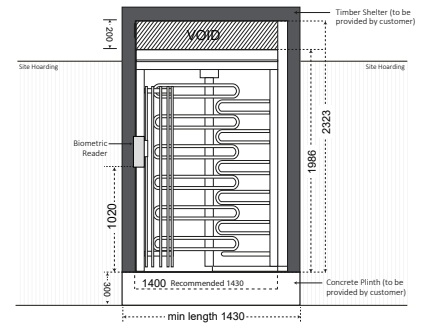


### Side - Design 1

Single Turnstile Suggested Shelter  
2 x 240VAC 6A Fuse Spur on site/ secure side (Turnstile & ACS). 200mm VOID above turnstile for removal of lid. Sarel Enclosure to be located on site/secure side. Do not scale.

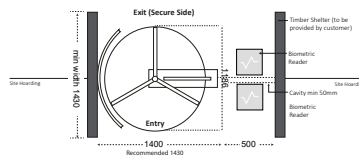

### Plan view - Design 2

Single Turnstile Suggested Shelter  
Minimum 50mm cavity is essential.  
Do not scale.

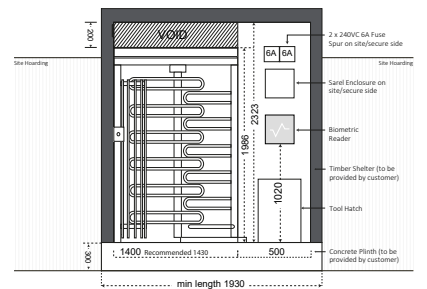

### Side - Design 2

Single Turnstile Suggested Shelter  
Walls must be removable (access to cavity). 2 x 240VAC 6A Fuse Spur on site/ secure side (Turnstile & ACS). 200mm VOID above turnstile for removal of lid. Sarel Enclosure to be located on site secure side. Do not scale.

**Tolerance** + or -5mm

**Weight** <400kg

**Power Req** 2 x 240v 7amp

### Delivery / offload information

Units are delivered on flatbed vehicle. These are then loaded with a manual lift assy (or tail lift) and pump trucked to location of work.

### Required of customer prior to install

- 300mm depth concrete plinth for turnstile with flat level surface.
- Minimum plinth dimensions (L) x (W) x (D): 1930mm x 1430mm x 300mm.
- Timber shelter built to MSite specification.
- 2x 240v isolated fused spur at turnstile location.